

HQ18005 (18 Passages Pneumatic Rotary Joint)

HQ18005 Series is 18 passages pneumatic rotary joint, with M5 port, can combine to transmit electricity.

It is made of special aluminum alloy, with small size, light weight and small torque.


Can transmit medium types: compressed gas, vacuum, etc.

Can combine to transmit: electrical power and signal, solenoid valve, control circuits, etc.

M5 port is a frequency-used port, ports like G1/8" port, G3/8" port, are the same.




HQ18005 18 IN 18 OUT M5 Port

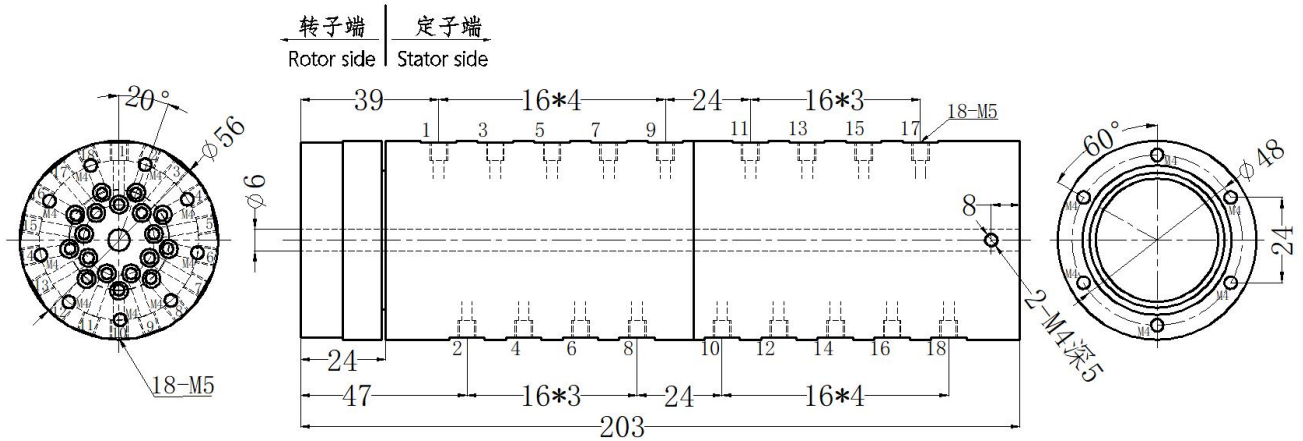

Model List

Model	Port Size	Gas Passage	Pipe Size
HQ18005	M5 Port	18	4 ~ 6mm

HQ18005-06M((12, 18, 24) 18 IN 18 OUT M5 Port+(6~24) Circuits Capsule Signal Slip Ring

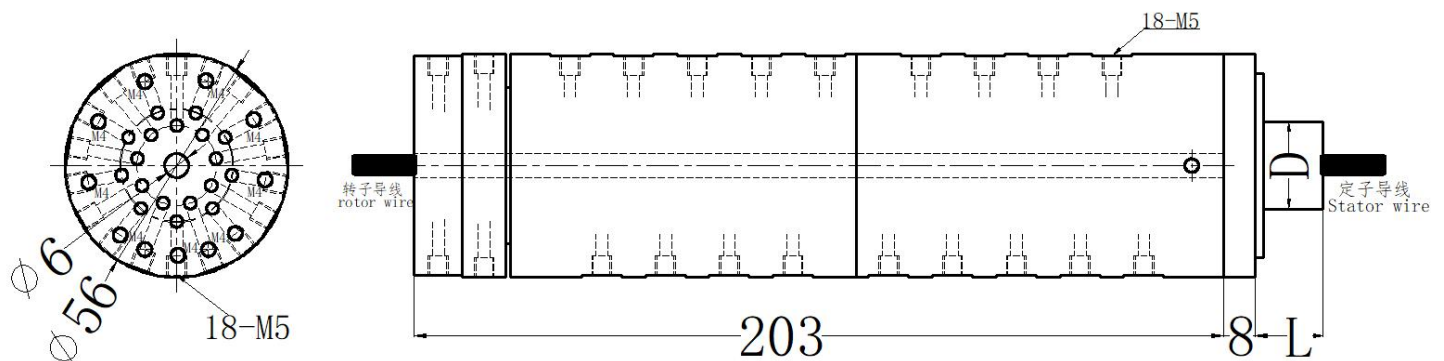

Model List (For other models, please contact customer service)

Model	Port Size	Gas Passage	Signal Circuits@1 ~ 2A	L (mm)	D (mm)	Pipe Size
HQ18005-06M	M5 Port	18	6	17	22	4 ~ 6mm
HQ18005-12M	M5 Port	18	12	24.5	22	4 ~ 6mm
HQ18005-18M	M5 Port	18	18	31.9	22	4 ~ 6mm
HQ18005-24M	M5 Port	18	24	39.6	22	4 ~ 6mm
HQ18005-36M	M5 Port	18	36	54.5	22	4 ~ 6mm

Technical Specification

Mechanical		Electrical		
Spec	Data	Spec	Data	
Gas Passage	18 IN 18 OUT, M5 Port		Power	Signal
Pressure & Torque	Max. 1MP, Vacuum-1.5Kpa; Torque < 1.2 N.m	Voltage	0 ~ 240VAC/VDC	0 ~ 240VAC/VDC
Working Life	About 10 million revolutions (depend on the working environment)	Resistance	≥ 500MΩ/300vdc	≥ 500MΩ/300vdc
Rated Rotating Speed	500RPM	Lead Wire Spec	AWG16#Tin-plated Teflon	AWG22#Tin-plated Teflon
Working Temp. & Humidity	-30°C ~ -75°C, 0 ~ 80%RH	Lead Wire Length	Standard Length: 300mm	
Material	Housing Material: Aluminum Alloy Contact Material: Precious Metal	Insulation Strength	500VAC@50Hz, 10s	
IP Grade	IP51	Electrical Noise	<0.01Ω	

Product Quality Level Table

Grade Code	Working Life	Sealing Ring	Max. Rotating Speed
VD (Industrial)	6 million revolutions	Imported brand	300RPM
VC (Standard)	5 million revolutions	Domestic brand	100RPM